

### TX4G-JKC-19 Product Data Sheet

# 4G/LTE Bendable Rubber Antenna SMA-J Connector



## 成都亿佰特电子科技有限公司



#### **I. Product Introduction**

TX4G-JKC-19 is a 4G/LTE bendable rubber antenna. Height of the antenna is 190mm. With a SMA-J connector (SMA inner screw thread and inner needle), it can be applied to such broadband communication system, WiFi, mobile terminal devices with frequency of 4G/LTE as router, AP, radio, aircard, smart TV and so on.


#### II. Specification and Parameters


| Physical Parameters |                                           |
|---------------------|-------------------------------------------|
| Bandwidth           | 4G/LTE                                    |
|                     | 698-960MHz,1710-2700MHz                   |
| Gain                | 5dBi                                      |
| SWR                 | ≤1.5                                      |
| Polarization        | Vertical                                  |
| Radiation Direction | Omnidirectional                           |
| Input Impedance     | 50 Ω                                      |
| Power Capacity      | 20W                                       |
| Other Parameters    |                                           |
| Height              | 190mm                                     |
| Total Weight        | 18g                                       |
| Coat Material       | TPEE                                      |
| Connector           | SMA-J                                     |
|                     | (SMA inner screw thread and inner needle) |
| Working Temperature | -40°C ∼+85°C                              |
| Storage Temperature | -40°C ∼+85°C                              |






#### III. Testing

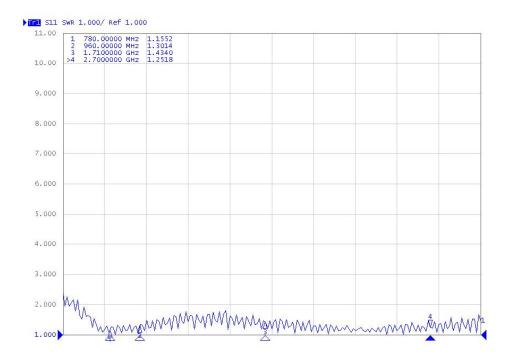


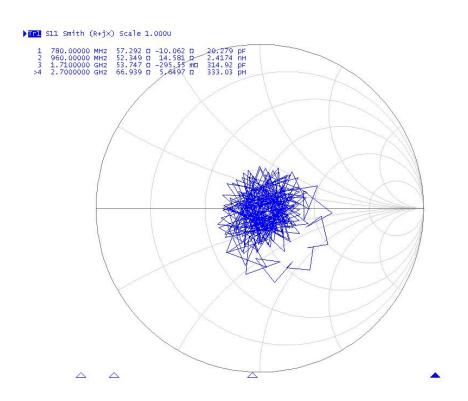





#### XY Plane

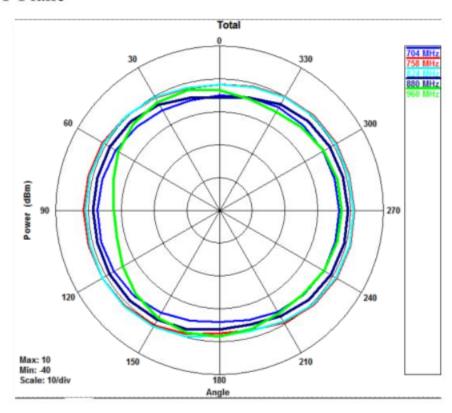

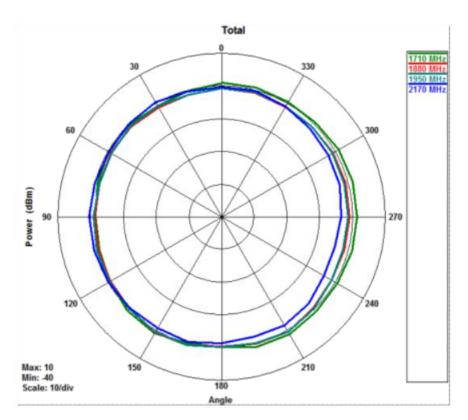


#### XZ Plane

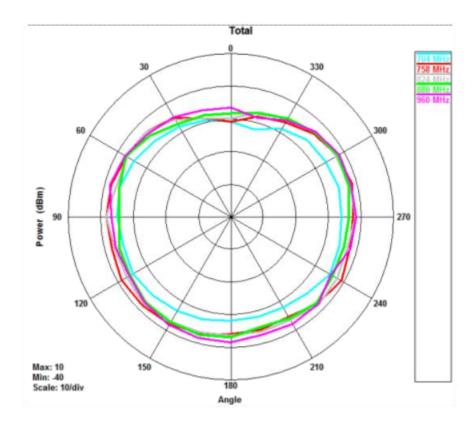


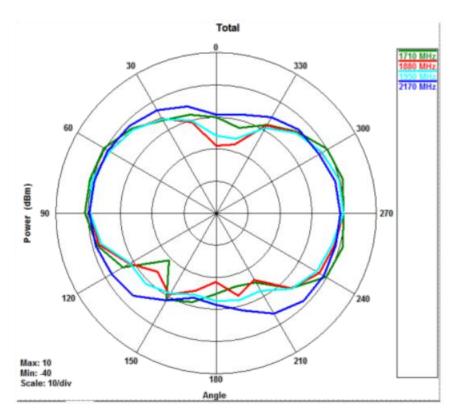



#### YZ Plane

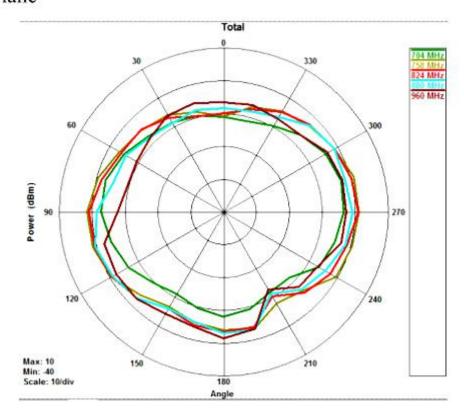

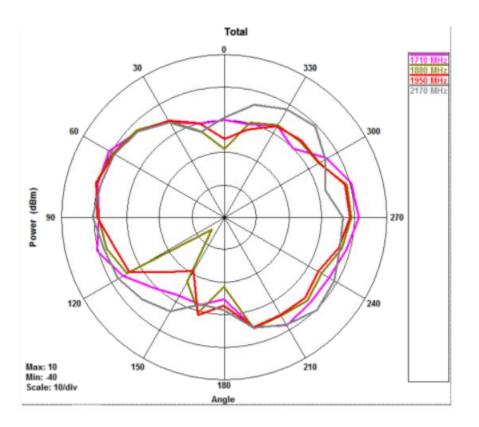



#### IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

#### About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Fax: 028-64146160 ext. 821

Web: www.ebyte.com

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

